

**BUILT TO
YOUR DESIGN
OBJECTIVES**

SINGLE SOURCE

GLASS
FINISH
INSTALLATION

SAFETY

OBSTRUCTION SENSING
PHOTO EYES
FAIL SAFE DEVICE



RENLITA
Custom Opening Solutions

S-500 LIFTAWAY

MADE IN THE USA

*Walls of Glass or An Operable
Wall Showcases Your Project.*

The Renlita Liftaway S-500 counterweight balanced single leaf system offers versatility and customizable features to exceed your design expectations.

Make an outstanding design statement with the S-500 Liftaway's capability to accept a variety of cladding materials, and fit a wide variety of openings while using minimal jamb space.

Whether it is a wall of glass, wood, metal, stone or laminate, the S-500 Liftaway system will elegantly showcase your project.





FEATURES

The Renlita S-500 Liftaway is a single leaf, vertical opening solution utilizing counterweight balanced technology to ensure smooth operation and durability. The S-500 Liftaway systems are suitable for residential, commercial, and industrial applications.

The Liftaway system is designed to rise into the ceiling structure or lower into the floor structure, which gives the customer the versatility to accommodate their design needs. From **Concept to Completion**, Renlita provides a turnkey service that includes custom finish, glass or cladding, installation, and service.

Single source service provides customers with confidence that all aspects of the project are properly coordinated and designed while providing a single warranty for the entire system. Renlita is the industry leading provider of vertical custom opening solutions utilizing patented safety devices, complete NFRC thermal testing, in-house engineering services, and architectural grade finishes and components.

Contact Renlita to begin designing your next customized solution.



WWW.RENLITAME.COM


+974 3355 3947
MARHABA@RENLITAME.COM





SPECIFICATIONS

S-500 LIFTAWAY

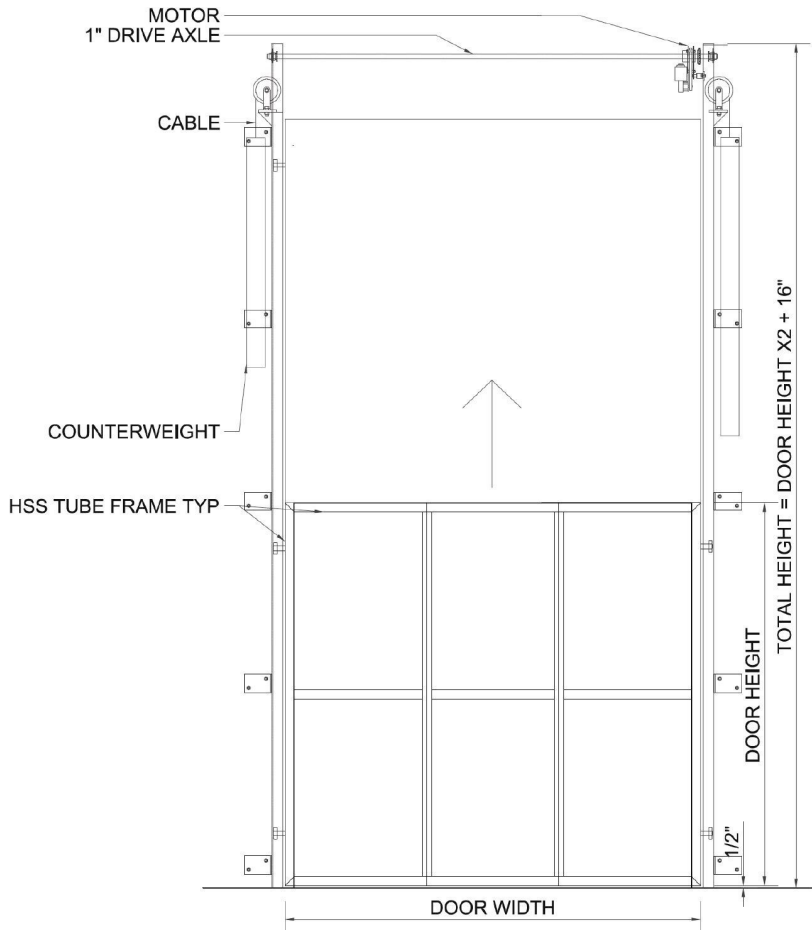

Counterweight Balanced Door

The frame is constructed from structural steel sections and designed to meet wind loads of 35 psf minimum in the closed position and during operation.

Operation

The Lift-Away System is a single leaf balanced with counterweights that are located at each jamb. Vertical travel of the door is controlled by multiple guide rollers that glide in operating channels mounted at each jamb.

Size

Maximum Width : 50'
Maximum Height: 20'

Cladding

Wood - Metal - Stone - Glass
Customer Specified
*4" thick
*15 psf

Finishes

Powder coated to AAMA 2604 standard color options
RAL colors
IFS Architectural Colors
Custom color matches upon special request

Counterweight Covers

The counterweights installed at each jamb will be protected and covered with a removable formed aluminum cover. These covers can be powder coated to match system frame and operating channels.

Motorized or Manual

Motorized: 110 volt/ 8 amps motor system. Renlita Electric Direct Drive (REDD) Included.

Obstruction sensing technology
Controls / Touch screen control station

Manual: Operated by hand without special cranks or tools

Max size: 50' W X 20' H

Suitable for residential, commercial
and industrial applications

Designed to rise into the ceiling
structure or lower into floor.

Standard photo eye sensor included

Standard safety break

Turn-key / Single source

Made in the USA

Auto Reverse Sensing Motor



RENLITA
Custom Opening Solutions

WWW.RENLITAME.COM

Made in the USA - Ships Worldwide

+974 3355 3947

MARHABA@RENLITAME.COM